




www.simotrade.hu

AREA OF USE

The CANOPY LED IP65 luminaire family is recommended for general-purpose lighting in environments such as gas stations, as well as food, and electronics manufacturing facilities.



CANOPY LED

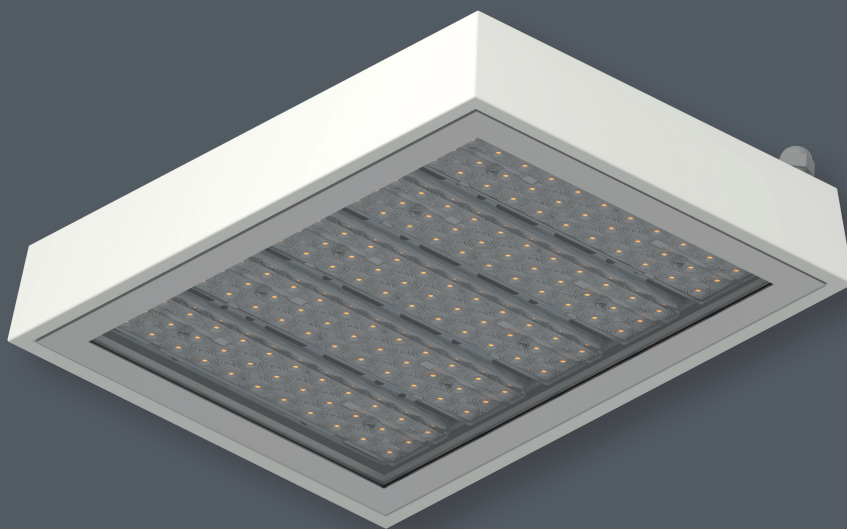

BASE MATERIAL

Housing of the luminaire: steel sheet painted with epoxy polyester based paint in RAL 9003 color.

Cover: 4mm thick tempered glass, in anodized extruded aluminum frame.

Gasket: silicone profile placed into the frame of the cover.

LED optics: available with 110°, 60°, 90°, 30° beam angle optics.

INSTALLATION

The luminaires can be mounted into metal artificial ceiling, canopy, and sandwich panels, up to 60mm of thickness.

warranty 5 year	LED	230V 50Hz	CRI >80	SDCM 3	CCT 4000K	IP 65	90°	⏏	Ta 25°C	CE
--------------------	-----	--------------	------------	-----------	--------------	----------	-----	---	------------	----

Ordering code	Product name	LED Modules Lumen output (lm)	LED Modules Efficiency (lm/W)	Lumen output (lm)	Efficiency (lm/W)	LED Modules Power (W)	Power consumption (W)	A (mm)	B (mm)	C (mm)	D (mm)	F1 (mm)	F2 (mm)	Unit Weight (kg)
60 225 228 824	CANOPY LED-77	12780	182	10100	131	70	77	549	430	130	250	502	381	7,5

Available options:

