


FIELD OF APPLICATION

The DAISY range of luminaires are suggested for general illumination of public institutions, offices, banks. Glare-less lighting is achieved with lenses on the leds and shades.

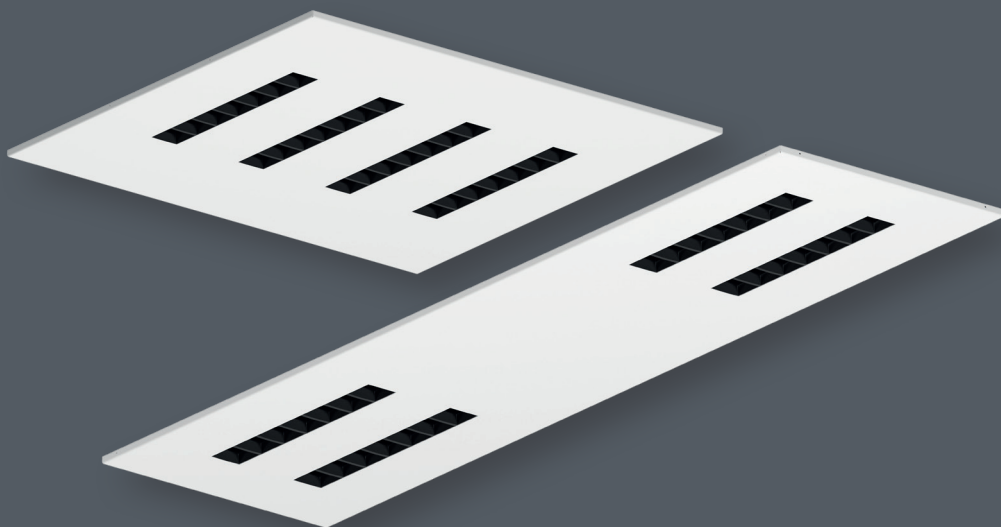

BASE MATERIAL

Housing of luminaire: white color powder painted steel sheet.

Diffuser: polycarbonate (PC), in black or white color.

LED lense: clear PMMA lense.

INSTALLATION

The DAISY luminaire can be recessed into artificial ceiling.

The DAISY M luminaire can be mounted onto the ceiling with a mounting bracket.

warranty 5 year	LED	230V 50Hz	UGR <19	SDCM 3	CRI >80	CCT 4000K	IP 20	80°	⏏	Ta 25°C	CE
--------------------	-----	--------------	------------	-----------	------------	--------------	----------	-----	---	------------	----

Order number	Type	LED Modules luminous flux (lm)	LED Modules efficiency (lm/W)	Luminaire luminous flux (lm)	Luminaire efficiency (lm/W)	LED Modules power (W)	Luminaire power (W)	A (mm)	B (mm)	C (mm)	Weight (kg)
60 000 000 5436	DAISY-28	4190	182	3710	133	23	28	595	595	24	4,5
60 000 000 5350	DAISY-39	5720	168	5210	133	34	39	595	595	24	4,5
60 000 000 5541	DAISY-28	4190	182	3710	133	23	28	1195	295	24	4,6
60 000 000 5542	DAISY-39	5720	168	5210	133	34	39	1195	295	24	4,6
60 000 000 5536	DAISY M-28	4190	182	3710	133	23	28	600	600	43	5
60 000 000 5537	DAISY M-39	5720	168	5210	133	34	39	600	600	43	5
60 000 000 5543	DAISY M-28	4190	182	3710	133	23	28	1200	300	43	5,1
60 000 000 5544	DAISY M-39	5720	168	5210	133	34	39	1200	300	43	5,1
70 181 040 549	DAISY MOUNTING BRACKET	-	-	-	-	-	-	601	601	43	0,5
70 181 036 508	DAISY MOUNTING BRACKET	-	-	-	-	-	-	1201	301	43	0,7

Options:

CRI >90	CCT 3000K	DIMM
------------	--------------	------

