





www.simotrade.hu

### AREA OF USE

The VANDA LED UGR<19 luminaire is designed for general and accent lighting applications, including reception counters, offices, public institutions, hotels, and other commercial environments. It is available in individual and system-mountable versions.

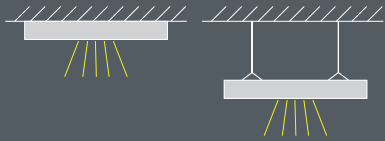

# VANDA LED UGR19

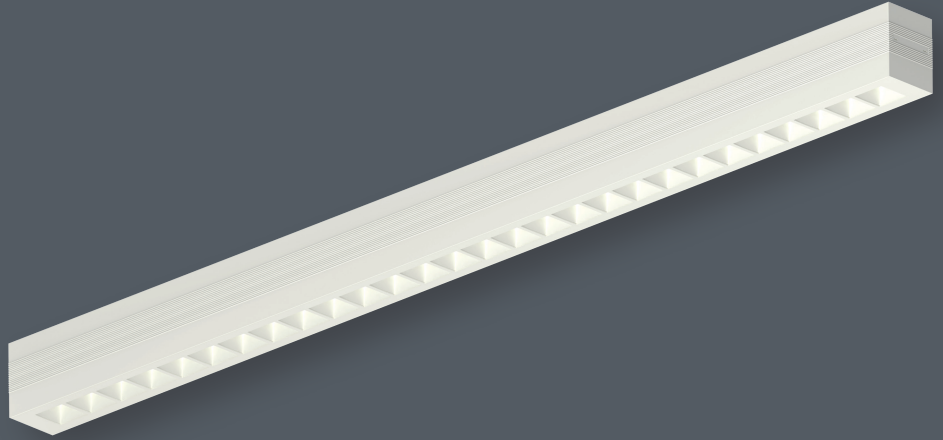

### BASE MATERIAL

**Housing of the luminaire:** extruded aluminum profile, powder painted for the required color.

**Diffuser:** polycarbonate (PC), in black or white color.

**LED lens:** clear PMMA lens.

**Lamp end:** ABS plastic.

### INSTALLATION

Luminaires can be mounted onto the ceiling or suspended.



Ordering code	Product name	LED Modules Lumen output (lm)	LED Modules Efficiency (lm/W)	LED Modules Lumen output (lm)	LED Modules Efficiency (lm/W)	LED Modules Power (W)	Power consumption (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Unit Weight (kg)
60 307 128 5101	VANDA LED-128 UGR19	2850	190	2650	147	15	18	1160	60	77	1090	63	2,2
60 307 135 596	VANDA LED-135 UGR19	7100	169	6000	128	42	47	1440	60	77	1415	63	2,5

### Available options:

